

Operation Mode:

**QUICK SETUP   STATUS   NETWORK   WIRELESS   MANAGEMENT   SYSTEM**

**Device Information**

Device Name: RFDS520  
Device Model: CPE520 v1.1  
Firmware Version: 1.3.3 Build 20160705 Rel. 52453  
System Time: 2018-06-20 12:44:46  
Uptime: 0 days 14:22:09  
CPU:  2%  
Memory:  54%

**Wireless Settings**

MAXstream: OFF  
Region: Australia  
Channel/Frequency: 153 / 5765MHz  
Channel Width: 20/40MHz  
IEEE802.11 Mode: A/N Mixed  
Max TX Rate: 300.0Mbps  
Transmit Power: 27dBm  
Distance: 11.0km

**Wireless Signal Quality**

Signal Strength: N/A  
Noise Strength: N/A  
SNR: N/A  
Transmit CCQ:  100

**Radio Status**

AP: Enabled  
MAC Address: 98-DE-D0-C6-8E-3E  
SSID: Moorabie\_5Ghz  
Security Mode: WPA-PSK  
Connected Stations: 2

**LAN**

MAC Address: 98-DE-D0-C6-8E-3E  
IP Address: 10.8.95.172  
Subnet Mask: 255.255.255.0  
Port0: 100Mbps - FD  
Port1: Unplugged

Client: Disabled  
MAC Address: N/A  
Security Mode: N/A  
WDS: N/A  
Root AP BSSID: N/A  
Root AP SSID: N/A  
TX Rate: N/A  
RX Rate: N/A  
Connection Time: N/A

**WAN**

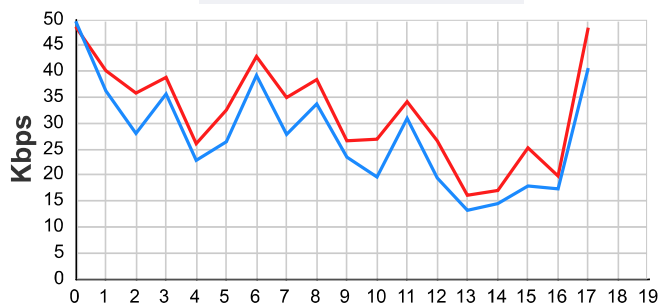
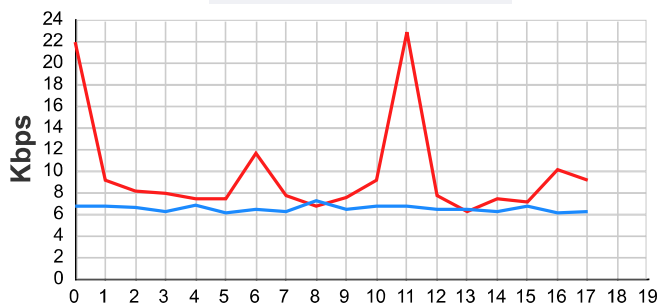
Connection Type: N/A  
MAC Address: N/A  
IP Address: N/A  
Subnet Mask: N/A  
Default Gateway: N/A  
DNS Server: N/A

**Monitor**

[Throughput](#)   [Stations](#)   [Interfaces](#)   [ARP Table](#)   [Routes](#)   [DHCP Clients](#)



Copyright © 2015 TP-LINK Technologies Co., Ltd. All rights reserved.