

Operation Mode:

QUICK SETUP STATUS NETWORK WIRELESS MANAGEMENT SYSTEM

Device Information

Device Name: NewBoreRFDS520
 Device Model: CPE520 v1.1
 Firmware Version: 1.3.3 Build 20160705 Rel. 52453
 System Time: 2018-06-20 12:42:50
 Uptime: 11 days 19:00:13
 CPU:
 Memory:

Wireless Settings

MAXstream: OFF
 Region: Australia
 Channel/Frequency: 153 / 5765MHz
 Channel Width: 20/40MHz
 IEEE802.11 Mode: A/N Mixed
 Max TX Rate: 300.0Mbps
 Transmit Power: 27dBm
 Distance: 11.0km

Wireless Signal Quality

Signal Strength:
 Noise Strength:
 SNR:
 Transmit CCQ:

Radio Status

AP: Disabled
 MAC Address: N/A
 SSID: N/A
 Security Mode: N/A
 Connected Stations: N/A

LAN

MAC Address: 18-D6-C7-D6-A2-CA
 IP Address: 10.8.95.173
 Subnet Mask: 255.255.255.0
 Port0: 100Mbps - FD
 Port1: 100Mbps - FD



Client: Enabled
 MAC Address: 18-D6-C7-D6-A2-CA
 Security Mode: WPA-PSK
 WDS: Auto
 Root AP BSSID: 98-DE-D0-C6-8E-3E
 Root AP SSID: Moorabie_5Ghz
 TX Rate: 45.0Mbps
 RX Rate: 30.0Mbps
 Connection Time: 0 days 14:19:49

WAN

Connection Type: N/A
 MAC Address: N/A
 IP Address: N/A
 Subnet Mask: N/A
 Default Gateway: N/A
 DNS Server: N/A

Monitor

[Throughput](#) [Stations](#) [Interfaces](#) [ARP Table](#) [Routes](#) [DHCP Clients](#)

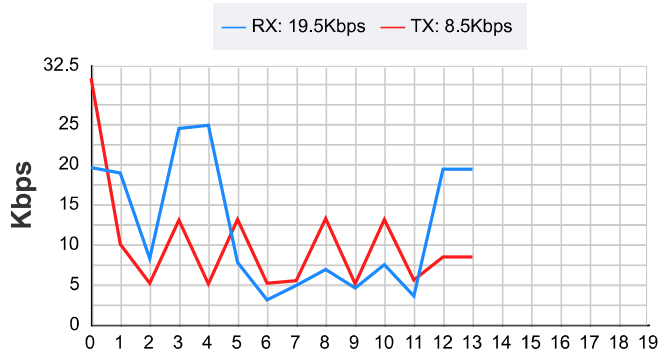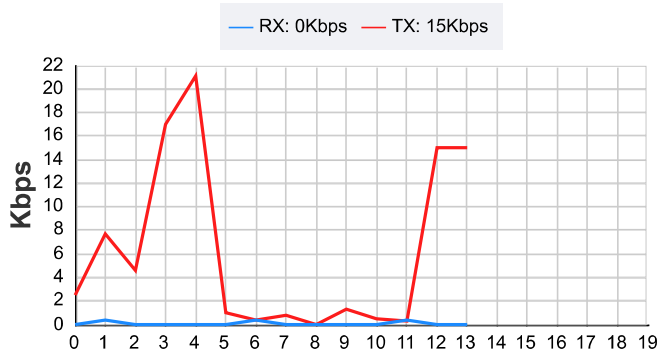

Copyright © 2015 TP-LINK Technologies Co., Ltd. All rights reserved.